
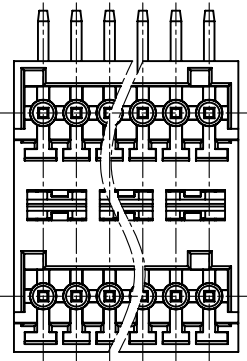

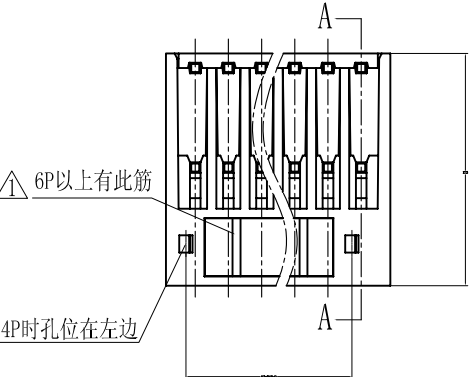
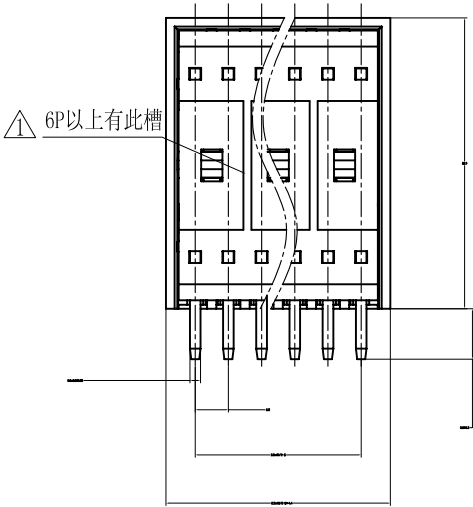



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△	10-0258	修改外观	Yi.Zeng	09/01/10*

- Notes:
- 1.Pitch:2.5,Poles4-24P
  - 2.Rated voltage/Current:UL1059 125V 4A  
IEC 100V 4A
  - 3.Operation temperatures:-40℃~+105℃
  - 4.Withstanding Voltage:AC1500V/1Min
  - 5.Insulation Resistance:5000MΩ/DC1000V
  - 6.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

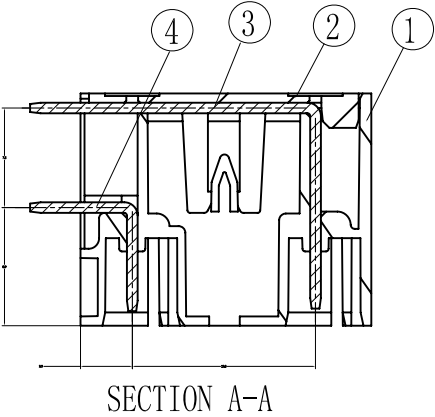

4	15EDGRC Pin	1218B00010 (H)	XX	Brass	SnCe
3	15EDGRH Pin	1045B00010 (H)	XX	Brass	SnCe
2	15EDGV/RH Cover	1045C0YXXA (H)	1	PA66	UL94V-0
1	15EDGV/RH Housing	1045A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

MM (INCH)		DATE 08/09/07*	 宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD		
TOLERANCES EXCEPT AS NOTED		CHKD			
MM		MFD			
.0 ±		APPVL			
.00 ±		MATERIAL :		NAME	
.000 ±		FINISH:		15EDGRH-2.5-XXP-1Y-00A (H)	
ANGLES ± 1°		SCALE : 1:1		DRAWING NO. 15EDGRH-2.5-E01	
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		/PART NO.	
		SHEET 1 OF 1		SIZE A4	
				REV T1 09/01/10*	