
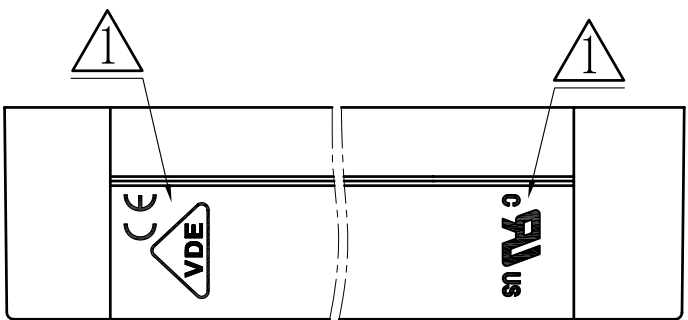


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加VDE, UL, CE刻字	Zengy	01/13/09	

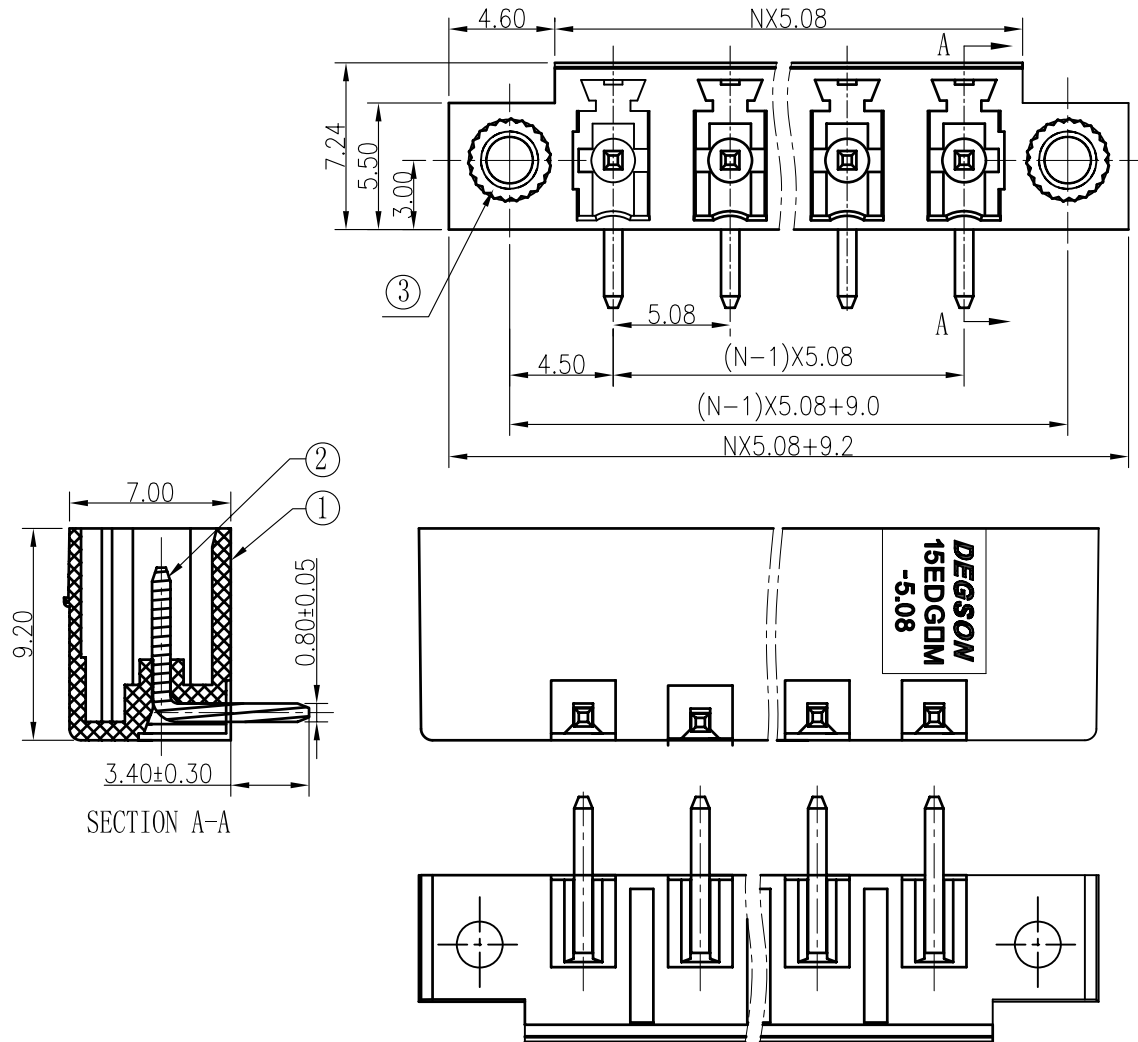

- Notes:
1. Pitch: 5.08mm, Poles: 2-12P
 2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
 3. Operation temperatures: -40°C ~ +105°C
 4. Withstanding Voltage: AC2000V/1min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
to	over	to	over	to	over	to	over	to	
6	6 to 10	10 to 24	24 to 30	30 to 60	60 to 100	100 to 150	150 to 200	200 to 250	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	—

3	2EDG screw cap	S000000040 (H)	2	Brass	
2	15EDGR (0.8*12.6R) Pin header	1003B00010 (H)	XX	Brass	SnCe plated
1	15EDGRM-5.08-Housing	1173A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
<div><div>DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div><div>NAME 15EDGRM-5.08-XXP-1Y-00A (H)</div><div>DRAWING NO. 15EDGRM-5.08-E01 /PART NO.</div><div>SCALE : 1:1</div><div>DO NOT SCALE DRAWING</div><div>SHEET 1 OF 1</div></div>					