

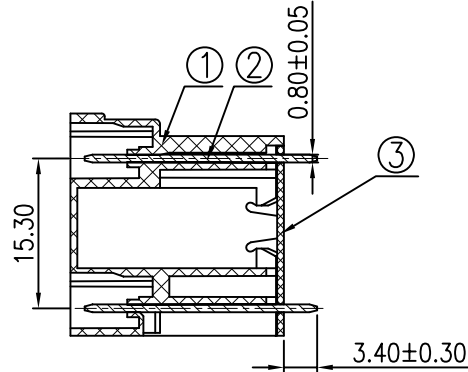
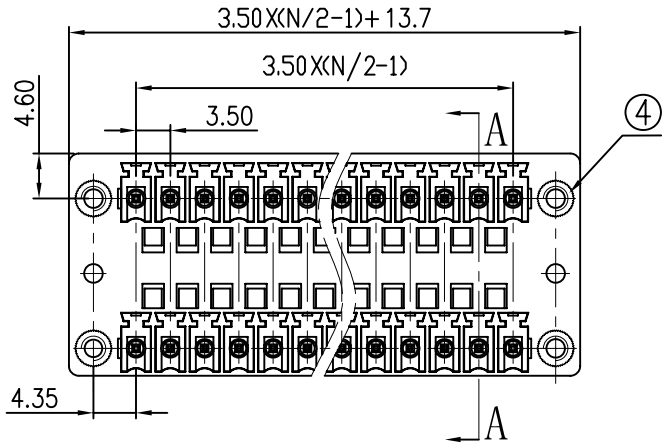
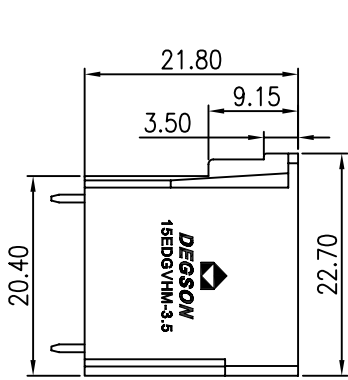
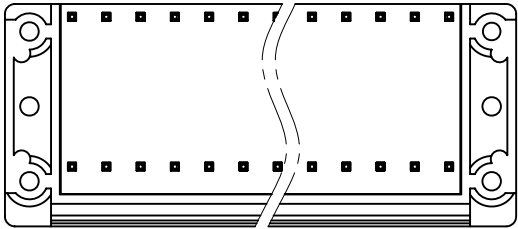


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		品名、料号增加环保标示“(H)”	LJH	12/11/07*
△		增加UL,CE刻字	Zengy	09/04/08*
△		增加VDE及参数刻字	LJH	02/10/09*

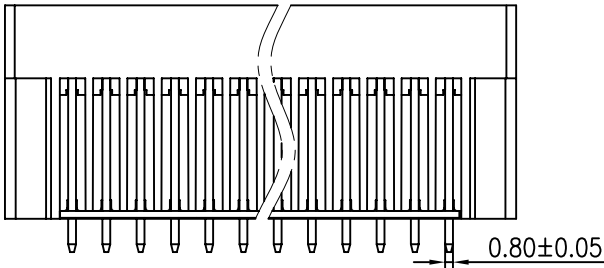

SECTION A-A



- Notes:
- 1. Pitch: 3.5mm , Poles: 4-48P
 - 2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
 - 3. Operation temperatures: -40℃~+105℃
 - 4. Withstanding Voltage: AC2000V/1Min
 - 5. Insulation Resistance: 5000MΩ/DC1000V
 - 6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

4	2EDG-Screw cap	S000000040 (H)	4	Brass	
3	15EDGV/RH-Cover	1063C0YXXA (H)	1	PA66	UL94V-0

2	15EDGVH-Pin	1063B00030 (H)	XX	Brass	SeSn plated
1	15EDGVHM-Housing	1081A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
<div><div>DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div><div>NAME 15EDGVHM-3.5-XXP-1Y-00A (H)</div><div>DRAWING NO. 15EDGVHM-3.5-E01 /PART NO.</div><div>SIZE A3</div><div>REV T3</div><div>02/10/09*</div></div>					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					