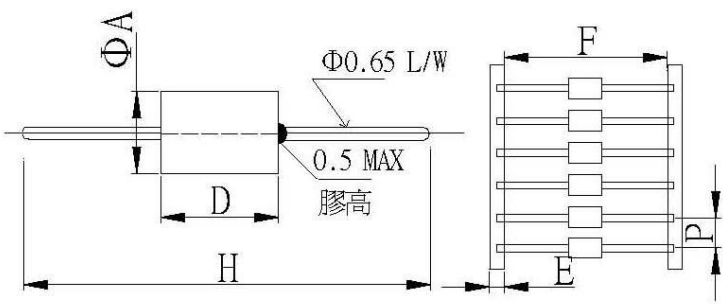


SPECIFICATION FOR APPROVAL

CUSTOMER :				DATE :	
PART NO : RHWT035050				DWG.NO : CT1122100	
CUSTOMER PART NO :				CUST.DWG.NO :	
(1) DIMENSION (UNIT: mm) 				A	3.5 ± 0.15 m/m
				D	5.0 ± 0.30 m/m
				E	6.0 ± 1.00 m/m
				F	52.0 ± 2.00 m/m
				P	5.0 (REF) m/m
				H	63.0 ± 1.00 m/m
				I	m/m
				J	m/m
				K	m/m
				L	m/m
(2) ELECTRICAL REQUIREMENTS					
Z	MIN	35 OHM	TEST FREQ	25	MHz
Z	MIN	60 OHM	TEST FREQ	100	MHz
Z	MIN	OHM	TEST FREQ		MHz
Z	MIN	OHM	TEST FREQ		MHz
TEST INSTRUMENTS					
HP-4286A					
WIRE	φ 0.65×63mm			APPROVED BY	
				吳載敏	
WINDING	1 TS			CHECKED BY	
				張明德	
				DRAWN BY	
				黃慧診	

CORE MASTER ENTERPRISE CO., LTD.

TEL: 886-2-8919-1288 FAX: 886-2-8919-1298 WEB: www.coremaster.com.tw

TEST DATA

CUSTOMER :					DATE :				
PART NO : RHWT035050					DWG.NO : CT1122100				
CUSTOMER PART NO :					CUST.DWG.NO :				
IMPEDANCE					DIMENSION (UNIT : mm)				
FREQ	25 MHz	100 MHz			A	D	H		
SPEC	MIN 35 OHM	MIN 60 OHM			3.5 ± 0.15	5.0 ± 0.30	63.0 ± 1.0		
1	47	75			3.52	5.07	62.97		
2	46	76			3.54	5.02	63.10		
3	48	74			3.52	5.03	63.14		
4	45	73			3.53	5.05	62.94		
5	47	75			3.52	5.06	62.99		
6	48	76			3.54	5.07	63.00		
7	45	74			3.52	5.03	63.13		
8	47	75			3.52	5.02	62.91		
9	45	74			3.53	5.04	63.16		
10	46	77			3.54	5.05	62.93		
\bar{X}	46.4	74.9			3.53	5.04	63.03		
R	3	4			0.02	0.05	0.25		
						APPROVED BY 吳載敏			
						CHECKED BY 張明德			
						DRAWN BY 黃慧診			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

RHWT035050

