SPECIFICATION FOR APPROVAL

CUSTOMER:	DATE:
PART NO: LCB1608-330Y-N	DWG.NO: TE9811301
CUSTOMER PART NO:	CUST.DWG.NO:

(1) DIMENSIONS (UNIT: mm)

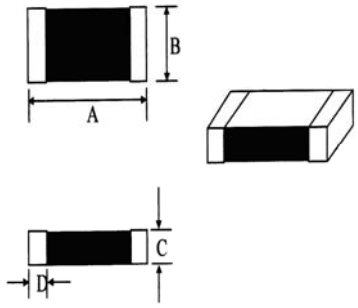

A	1.6 ± 0.2	m/m
B	0.8 ± 0.2	m/m
C	0.8 ± 0.2	m/m
D	0.3 ± 0.2	m/m
E		m/m
F		m/m
G		m/m
H		m/m
I		m/m
J		m/m

(2)ELECTRICAL REQUIREMENTS

Z (Ω)	33 ± 25%	TEST FREQ	100MHz/100mV
RDC (Ω)	0.03 (MAX)	TEST FREQ	
IDC (mA)	3000 (MAX)	TEST FREQ	

TEST INSTRUMENTS
HP4338A MILLIOHMMETER
HP4291B RF IMPEDANCE/MATERIAL ANALYZER

APPROVED BY
吳載敏

CHECKED BY
張明德

DRAWN BY
黃慧診

CORE MASTER ENTERPRISE CO., LTD.
TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER：				DATE：					
PART NO: LCB1608-330Y-N				DWG.NO: TE9811301					
CUSTOMER PART NO：				CUST.DWG.NO：					
ITEM	Z (Ω)	RDC (Ω)	IDC (mA)	DIMENSION (UNIT : mm)					
FREQ	100MHz /100mV			A	B	C	D		
SPEC	33 ± 25%	0.03 (MAX)	3000 (MAX)	1.6 ± 0.2	0.8 ± 0.2	0.8 ± 0.2	0.3 ± 0.2		
1	29.8	0.010	OK	1.60	0.82	0.81	0.33		
2	28.3	0.010	OK	1.60	0.81	0.82	0.33		
3	27.9	0.009	OK	1.61	0.82	0.82	0.28		
4	28.8	0.009	OK	1.61	0.82	0.83	0.32		
5	27.5	0.009	OK	1.61	0.84	0.81	0.30		
6	30.0	0.009	OK	1.62	0.83	0.82	0.32		
7	29.3	0.009	OK	1.62	0.84	0.81	0.33		
8	30.7	0.009	OK	1.63	0.81	0.82	0.29		
9	30.4	0.009	OK	1.63	0.83	0.81	0.31		
10	29.4	0.008	OK	1.64	0.81	0.83	0.30		
$\overline{X}$	29.21	0.009		1.62	0.82	0.82	0.31		
R	3.20	0.002		0.04	0.03	0.02	0.05		

	APPROVED BY 吳載敏
	CHECKED BY 張明德
	DRAWN BY 黃慧診

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw
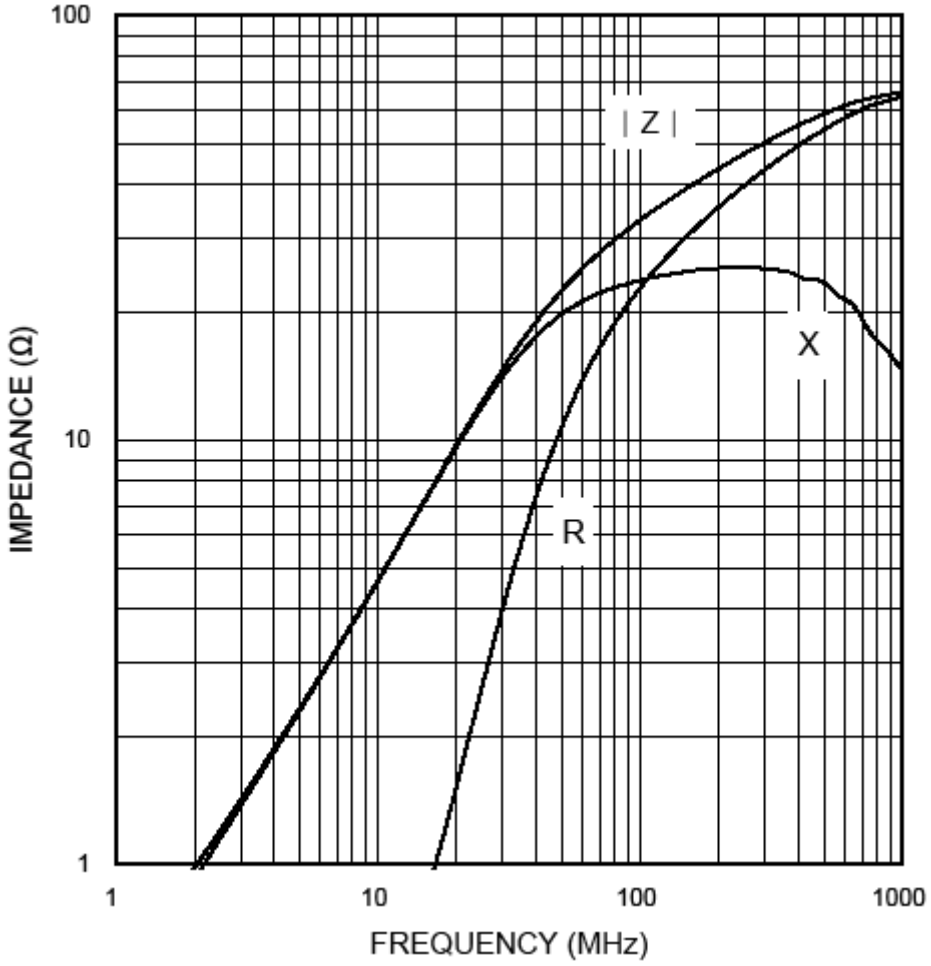
LCB1608-330Y-N