


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	05/13/06"
△		增加UL刻字	CSX	08/06/07"
△		品名、料号增加环保标示“(H)”	LJH	12/10/07"
△		修改料号	CSX	01/19/08"
△		图面更新	Zengy	09/05/08"

Notes:

1. Pitch: 7.5mm , Poles: 2P-XXP
2. Rated voltage/current: UL 300V/15A
VDE 450V/20A
3. Operation temperatures: -30° C~+120° C
4. Insulation Withstand Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 22-14AWG, 2.5mm²
7. Max. Torque Value: M2.5 , 4.08kgf.cm △
8. Undimensioned Tolerances:


Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	∅	∇
±0.10	±0.15	±0.25	±0.2±0.3	±0.3±0.5	±0.7±1.0	±0.005/0		

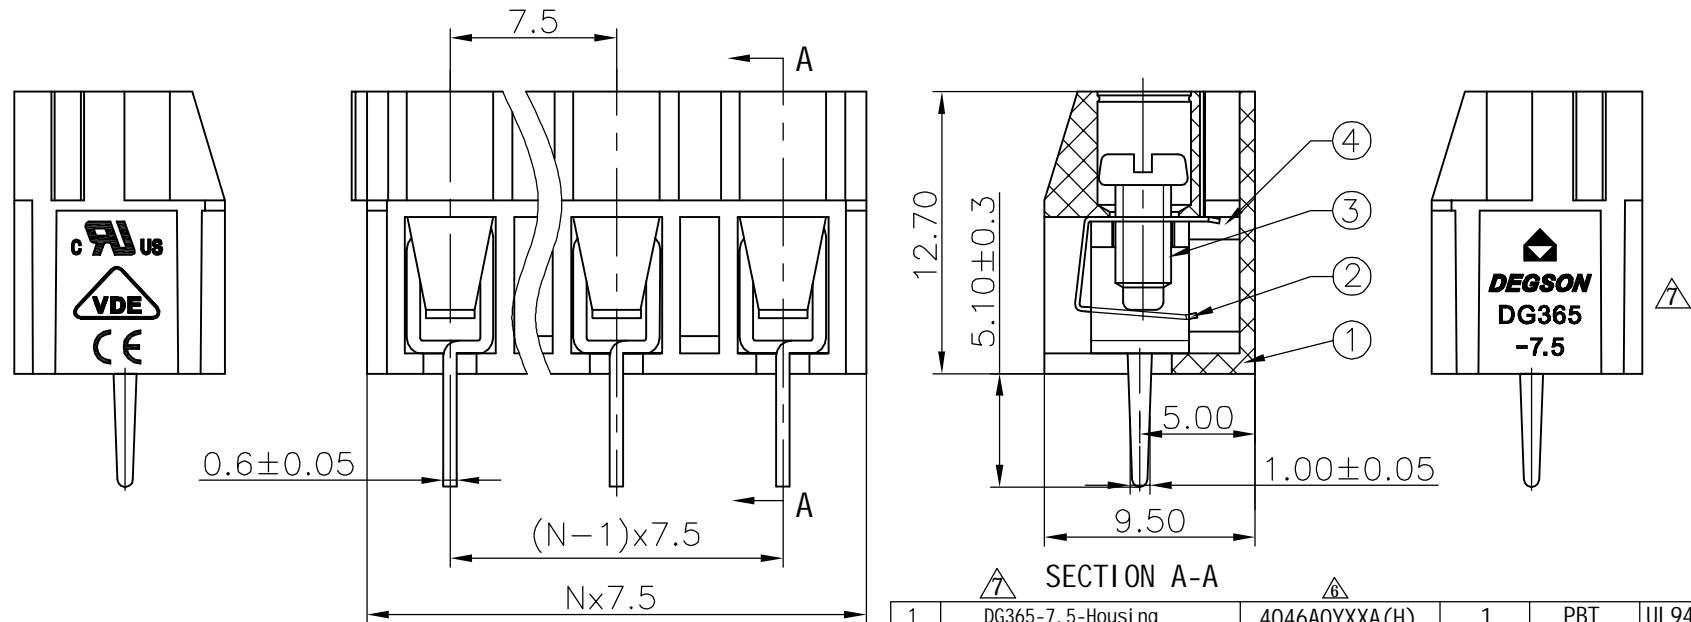

SECTION A-A

4	DG305-Pin header	4003B00010(H)	XX	Brass	SnCe
3	DG305-Screws	S000001620(H)	XX	Steel	Cr ³⁺ Zn
2	DG305-Spring	X000000260(H)	XX	Phosphor bronze	Ni plated




1	DG365-7.5-Housing	4046A0YXXA(H)	1	PBT	UL94V-0			
ITEM		NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTES	
DETACHED LISTS			DFTO Zhwm	DATE 07/22/04			 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE				
			MFO	DATE				
			APPL	DATE				
	MM		MATERIAL :			NAME DG365-7.5-XXP-1Y-00A(H)		
	.0 ±	±						
	.00 ±	±						
	.000 ±	±						
	ANGLES ± 1°		G.E :			DRAWING NO. DG365-7.5-E01	SIZE A3	REV T7 01/19/08
			FINISH :					
THIRD ANGLE PROJECTION		SCALE :			DO NOT SCALE DRAWING		SHEET 1	OF 1

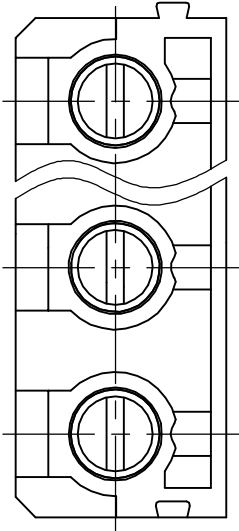

Pitch range in mm		Nominal dimension range	
over	to	over	to
6	10	30	60
10	24	60	100
10	30	100	150
10	15	10.25	10.2
10.25	10.2	10.3	10.5
10.3	10.5	10.7	11.0


- Notes:
1. Pitch: 7.5mm , Poles: 2P-XXP
 2. Rated voltage/current: UL 300V/15A
VDE 450V/20A
 3. Operation temperatures: -30° C~+120° C
 4. Insulation Withstand Vol tage: AC2000V/1Min
 5. Insulation Resistance: 500MΩ/DC1000V
 6. Wire Range: 22-14AWG, 2.5mm²
 7. Max Torque Value: M2.5 , 4.08kgf. cm
 8. Undimensioned Tolerances:

REVISION RECORD			
REV	ECO	DESCRIPTION	DATE
A		Drawing Revise	05/13/06
B		增加UL刻字	08/06/07
C		品名、料号增加标示“(0)”	12/10/07
D		修改料号	01/19/08
E		图面更新	09/05/08

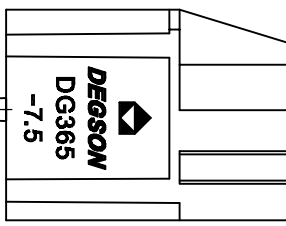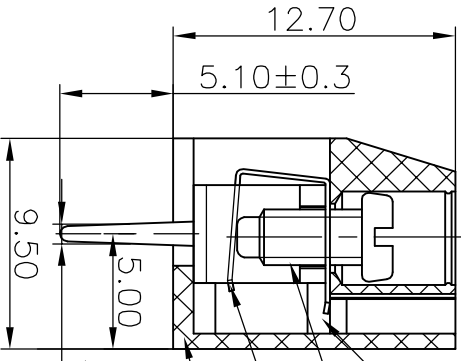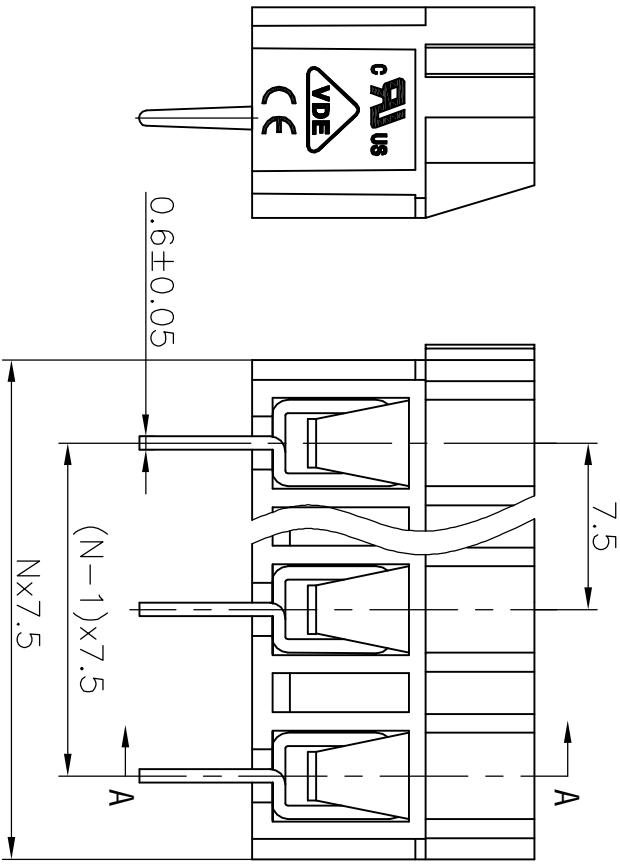

SECTION A-A

4	DG305-Pin header	4003B00010(H)	XX	Brass	SnCe
3	DG305-Screws	S000001620(H)	XX	Steel	Cr ³ +Zn
2	DG305-Spring	X000000260(H)	XX	Phosphor bronze	Ni plated

1	DG365-7.5-Housing	4046A0YXXA(H)	1	PBT	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS					
TOLERANCES EXCEPT AS NOTED					
MM (INCH)					
DFTO Zhuhai		DATE 07/22/04			
CHMO		DATE			
MFO		DATE			
APPLV		DATE			
NAME					
DG365-7.5-XXP-1Y-00A(H)					
△3					
MATERIAL : G.E. : FINISH : SCALE :					
THIRD ANGLE PROJECTION					
ANGLES ± 1°					
					
DRAWING NO. DG365-7.5-E01					
7/PART NO.					
SIZE REV 17					
A3 01/7/06					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					

DEGSON 宁波德正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
DG365-7.5-XXP-1Y-00A(H)

DRAWING NO. DG365-7.5-E01
/PART NO.